

APPLICATIONS



POWDER COAT FINISHES:
 Black Texture Polyester Powder Coat is standard. To order other finishes, add color code to catalog #.
 I.E. PGL-03-RST.

ACID TREATMENT for BRASS & COPPER only:
 Add Acid Rust (-BAR) or Acid Verde (-BAV) to catalog #.

Amenity by Southwest Greens

STANDARD BLACK TEXTURE -BLT	WHITE TEXTURE -WTX	BRONZE TEXTURE -BRT	RUST -RST	ANTIQUE VERDE -ATV	RUBBED VERDE -RBV
HUNTER TEXTURE -HTX	WEATHERED BROWN -WBR	STUCCO -STU	WEATHERED IRON -WIR	CAMEL TONE -CAM	CHROME POWDER -CPR
					TERRA COTTA -TRC

MOUNTING OPTIONS:
 For Solid Unfinished Brass, add -BRS to catalog #.
 • FA-01-BRS (Black PVC Telescopic Stake w/ brass cap available in 1' or 2')
 • FA-03/BRS (ABS Standard Stake add -BRS for Brass)
 • FA-03-LG (ABS Standard Stake)
 • FA-04 (Aluminum Stake)
 • FA-25-BRS (Commercial Mounting Pedestal)

optional

standard

Quick Connector
FA-05
Commercial Mounting Pedestal



landscape • entertainment • architectural • hospitality • illumination

PGL SERIES

★ **FOCUS INDUSTRIES, INC.™**
 World Headquarters • 25301 Commercentre Drive, Lake Forest, CA 92630 www.focusindustries.com
 Phone: (949) 830-1350 • Fax: (949) 830-3390 • Toll Free: (888) 882-1350 • E-Mail: sales@focusindustries.com



REGIONAL DISTRIBUTION CENTERS

- 1 N. CALIFORNIA: 1 Light Sky Court, Suite #4, Sacramento, CA 95828 Ph. (916) 386-2233 • Toll Free (800) 972-0911 • Fax (916) 386-2232 • rex@repcor1.com
- 2 ARIZONA: 5001 S. 36th Street, Phoenix, AZ 85040 Ph. (602) 258-1557 • Fax (602) 258-1558 • travis@repcorp.com
- 3 NORTH CAROLINA: 705 S. Railroad Street, Salisbury NC 28144 Ph. (704) 642-0280 • Fax (704) 642-0804 • pml@pricemarketing.com
- 4 PENNSYLVANIA: 11500 Roosevelt Blvd., Unit G-1, Philadelphia, PA 19116 Ph. (215) 677-6870 • Toll Free (800) 468-0801 • Fax (215) 677-1261 • armand@associatedmarketing.net





12V PUTTING GREEN LIGHTS

THE ULTIMATE 120V PUTTING GREEN LIGHT

PGL-01



(5,000 Hours)

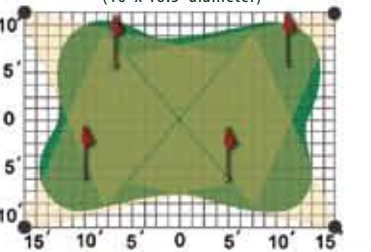
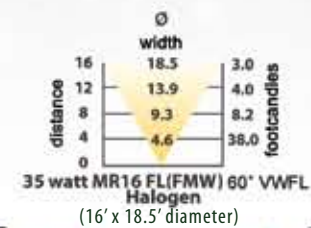


PGL-01 LIGHT DISTRIBUTION

PGL-02



(10,000 Hours)


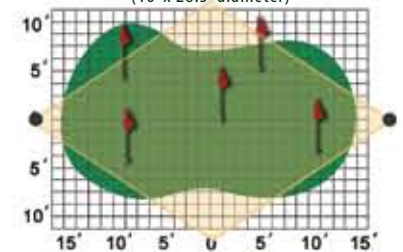



PGL-02 LIGHT DISTRIBUTION

PGL-03



(5,000 Hours)

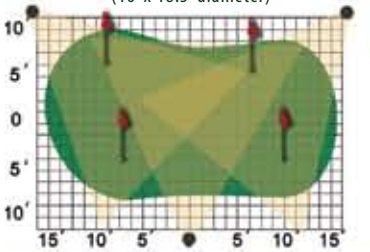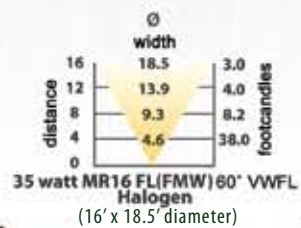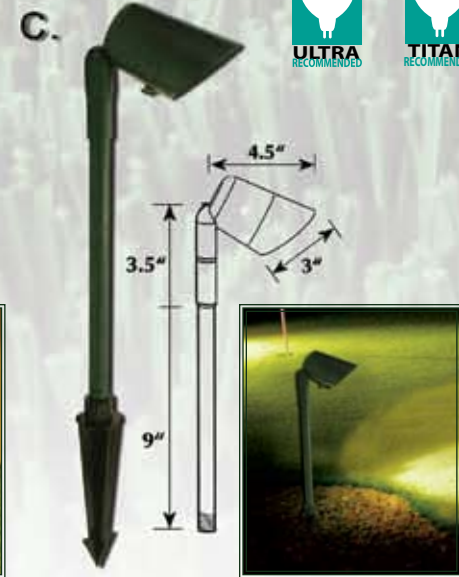

PGL-03 LIGHT DISTRIBUTION

D.

PGL-04



Features a cup holder, ball holder and two putter holders



- Housing: Extruded Black ABS w/Aluminum Fixture Head
- Socket: GX23 Bi Pin
- Lamp: 13w Compact Fluorescent 41k Cool White
- Lamp Life: 10,000+ Hours Average Rating
- Lens: High Impact Clear Acrylic
- Reflector: Highly Polished Specular Aluminum
- Ballast: Type 1 Outdoor Magnetic Clamped Core for All 120 Volt Compact Fluorescent Lights
- Primary Amp Draw for 120V is 0.165 Amp.

NEW! PGL-05 CUP LIGHT





- Housing: Die Cast Brass Cuplight with Stamped Brass Bracket
- Lens: Clear Convex w/ optional color (Green, Blue, Red, Yellow)
- Socket: GU5.3 High temperature ceramic bi-pin
- Lamp: 20w MR16 (ESX)
- Connection: FA-05 Quick Connector (Not Supplied)
- Wiring: Black 25 Foot Lead Wire 16/2



PGL-05 Cup Lights shown with optional FA-FLAG acrylic flags

12V ADJUSTABLE AREA LIGHTS

Other Alternatives for Putting Greens:

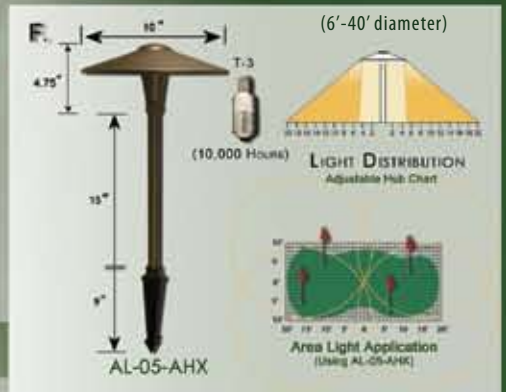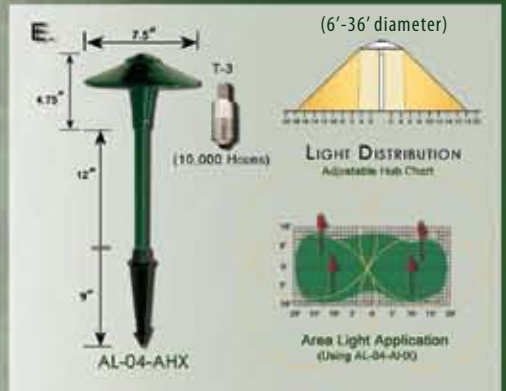

SPECIFICATIONS

- A. Housing:** Cast Aluminum or Cast Brass
 - Stem:** 9" Stem 7/8" O.D. Extruded Aluminum Threaded 1/2" NPS
 - Socket:** G5.35 Ceramic Bi-Pin 250°C Teflon Wire
 - Lamp:** 35w MR16 60° (VWFL) (50w max)
 - Lens:** Solite Tempered Glass Lens
 - Mounting:** FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
 - Connection:** FA-05 Quick Connector (Not Supplied)
 - Wiring:** Black 3' 18-2 Zip Cord 25 Foot Lead Wire Available 16/2 add (-25F)
- B. Housing:** Extruded Aluminum or Cast Brass
 - Stem:** 25" Stem 7/8" O.D. Extruded Aluminum Threaded 1/2" NPS
 - Socket:** BA-15 D.C. Brass/Nickel Plated
 - Lamp:** 35w T4/D.C. Halogen (50w max)
 - Lens:** Clear Tempered Glass Lens
 - Mounting:** FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
 - Connection:** FA-05 Quick Connector (Not Supplied)
 - Wiring:** Black 3' 18-2 Zip Cord 25 Foot Lead Wire Available 16/2 add (-25F)
- C. Housing:** Cast Aluminum or Cast Brass
 - Stem:** 9" Stem 7/8" O.D. Extruded Aluminum Threaded 1/2" NPS
 - Socket:** G5.35 Ceramic Bi-Pin 250°C Teflon Wire
 - Lamp:** 35w MR16 60° (VWFL) (50w max)
 - Lens:** Solite Tempered Glass Lens
 - Mounting:** FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
 - Connection:** FA-05 Quick Connector (Not Supplied)
 - Wiring:** Black 3' 18-2 Zip Cord 25 Foot Lead Wire Available 16/2 add (-25F)

SPECIFICATIONS

- E. Housing:** Cast Aluminum or Cast Brass 7.5" Hat
 - Stem:** 12" Stem 7/8" O.D. Tube
 - Socket:** S.C. Bayonet Base (BA-15s)
 - Lamp:** 20w T3 S.C. Xenon (35w max)
 - Mounting:** FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
 - Connection:** FA-05 Quick Connector (Not Supplied)
 - Wiring:** Black 3' 18-2 Zip Cord 25 Foot Lead Wire Available 16/2 add (-25F)
- F. Housing:** Cast Aluminum or Cast Brass 10" Hat
 - Stem:** 15" Stem 7/8" O.D. Tube
 - Socket:** S.C. Bayonet Base (BA-15s)
 - Lamp:** 20w T3 S.C. Xenon (35w max)
 - Mounting:** FA-03 Black PVC Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
 - Connection:** FA-05 Quick Connector (Not Supplied)
 - Wiring:** Black 3' 18-2 Zip Cord 25 Foot Lead Wire Available 16/2 add (-25F)
- G. Housing:** Solid Copper, Unfinished 6.5" Hat
 - Stem:** 14" Stem 1 1/8" O.D. Tube
 - Socket:** S.C. Bayonet Base (BA-15s)
 - Lamp:** 20w T3 Xenon S.C. (35w max)
 - Lens:** Clear Tempered Glass Lens
 - Mounting:** FA-03 Brass Stake Supplied or FA-25 Commercial Mounting Pedestal Optional
 - Connection:** FA-05 Quick Connector (Not Supplied)
 - Wiring:** Black 3' 18-2 Zip Cord 25 Foot Lead Wire Available 16/2 add (-25F)